

## XXLS 10" Subwoofer



Type Number: 830846

### Features:

This new series of state-of-the-art subwoofers continue to enhance Peerless' reputation for delivering the highest quality components for bass in the world. Called the XXLS - for "Xpanded Extra Long Stroke" - these new audio transducers add even more excursion to the Peerless XLS line, and completely eliminate distortion.

See architecture notes for [XXLS Platform](#)

Driver Highlights: Thick Nomex cone, 51 mm voice coil, ALP, DVC

See [Application Notes](#)

[Go to Application Notes.](#)

[Go to Architecture Notes](#)



### Specs:

#### Electrical Data

Nominal impedance	Zn	4	ohm
Minimum impedance	Zmin	3.1	ohm
Maximum impedance	Zo	71.5	ohm
DC resistance	Re	2.6	ohm
Voice coil inductance	Le	1.6	mH
Capacitor in series with x ohm	Cc	--	uF

#### T-S Parameters

Resonance Frequency	fs	24.3	Hz
Mechanical Q factor	Qms	9.24	
Electrical Q factor	Qes	0.34	
Total Q factor	Qts	0.33	
Force factor	Bl	10.1	Tm
Mechanical resistance	Rms	1.48	Kg/s
Moving mass	Mms	89.7	g
Suspension compliance	Cms	0.48	mm/N
Effective cone diameter	D	21.2	cm
Effective piston area	Sd	352	cm <sup>2</sup>
Equivalent volume	Vas	81.8	ltrs
Sensitivity (2.83V/1m)		91	dB
Ratio BL/√(Re)		6.3	
Ratio fs/Qts	F	73	

#### Power handling


100h RMS noise test (IEC)	175	W
Long-term Max Power (IEC 18.3)	350	W
Max linear SPL (rms) @ power	--	dB/W
Short Term Max power (IEC 18.2)	--	W

#### Voice Coil and Magnet Parameters

Voice coil diameter	51	mm
Voice coil height	33	mm
Voice coil layers	2	
Height of the gap	8	mm
Linear excursion +/-	12.5	mm
Max mech. excursion +/-	--	mm
Flux density of gap	--	mWb
Total useful flux	2.3	mWb
Diameter of magnet	147	mm
Height of magnet	35	mm
Weight of magnet	2.4	Kg

Notes:  
IEC specs refer to IEC 60268-5 third edition.  
All Tympany products are RoHS compliant.

Frequency: 830846

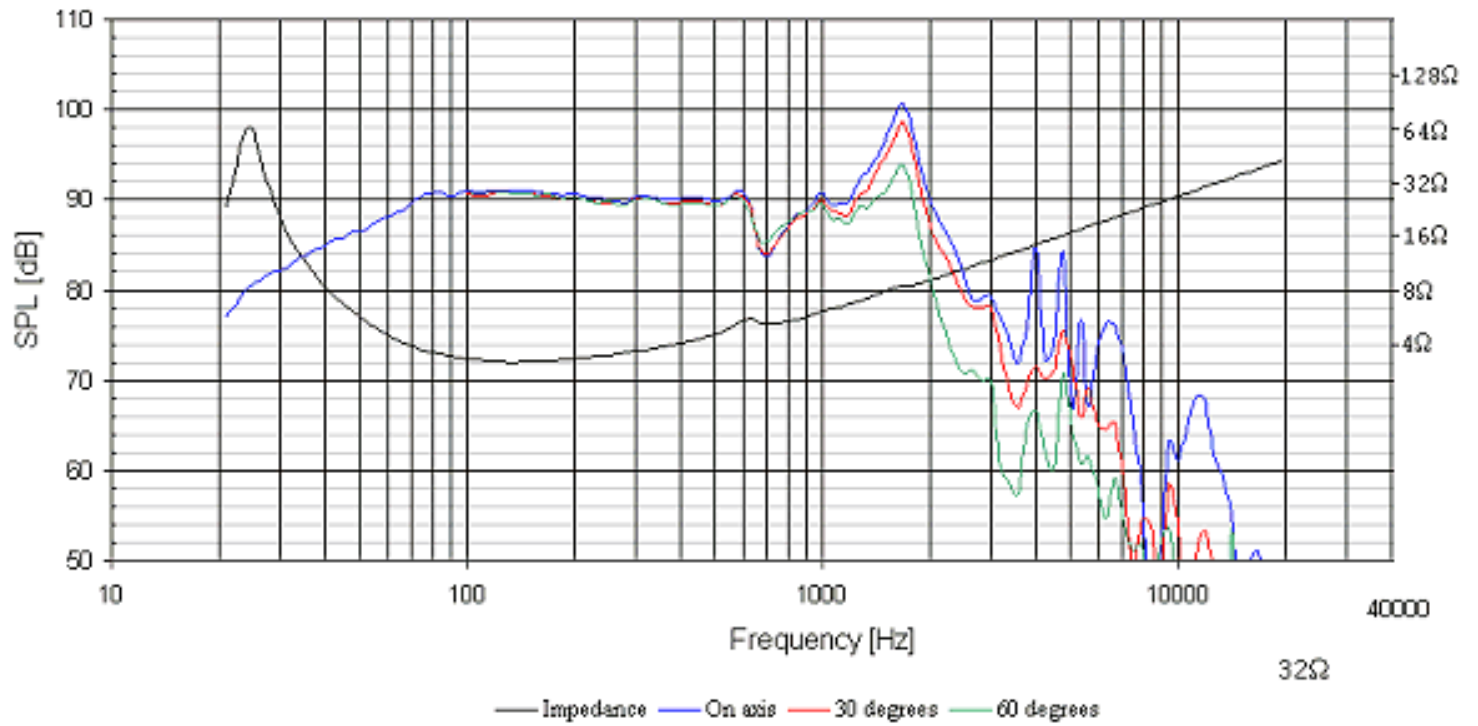

Mechanical Dimensions:830846

