



## Car speaker ARV-040-03/4

A indirect-radiator electrodynamic loudspeaker designed for trasmission of tones of the upper part of the audible frequency for sound-tracking of interior of cars.

### ACOUSTICAL DATA

Rated noise power <sup>1)</sup>	5	W
Short term maximum power <sup>2)</sup>	12	W
Rated impedance	4	Ohm
Resonance frequency Fs	-	Hz
Rated frequency range	2000 - 20000	Hz
Sensitivity <sup>3)</sup>	84	dB

### MECHANICAL DATA


Voice coil carrier material	samonosná	
Voice coil diameter	19.4	mm
Winding height of voice coil	1.9	mm
Yoke diameter	18.6	mm
Air gap height	1.3	mm
Magnet external diameter	18	mm
Magnet internal diameter	-	mm
Magnet height	3	mm
Compensating magnet external diameter	-	mm
Compensating magnet internal diameter	-	mm
Compensating magnet height	-	mm
Weight	0.03	kg

1) CSN IEC 268-5, without baffle.

2) CSN IEC 268-5, without baffle.

3) CSN IEC 268-5, standard baffle, 1 W, 1 m, 2000 - 20000 Hz

Frequency response

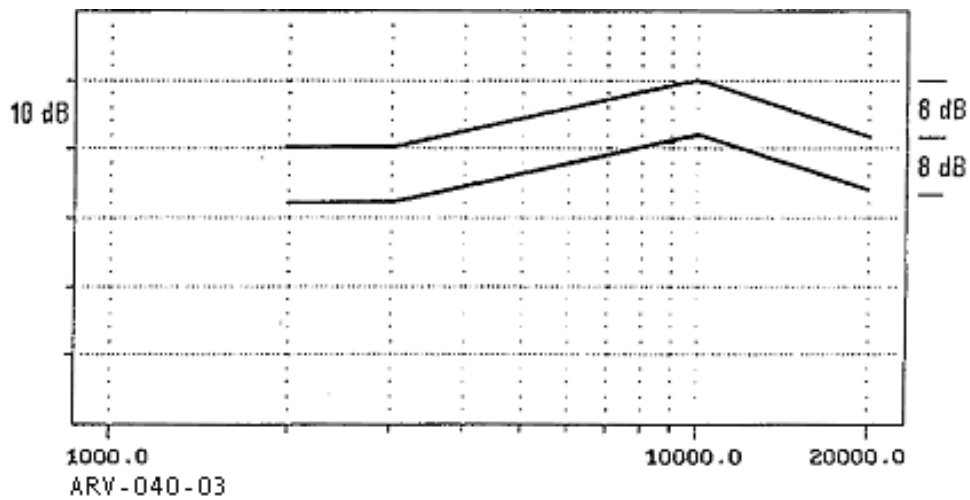

Drawing

