


## CONE MIDRANGE LOUDSPEAKER GDM 16/80/1

### TECHNICAL DATA

Rated impedance	8	Ω
Voice coil resistance	7	Ω
Rated frequency range	0,7 to 9	kHz
Resonance frequency	0,4	kHz
Recommended crossover frequency	1	kHz
Power handling capacity, P1/P2		
measured with filter	80/30	W
Max. power	120/45	W
Sensitivity	94	dB
Flux density	1,06	T
Energy in air gap	337,9	mJ
Air - gap	35/6/1,2	mm
Voice coil height	7,5	mm
Magnet		
- material	ferrite	
- dimensions	110/60/18	mm
- mass	0,6	kg
Mass of loudspeaker	1,8	kg

### AVAILABLE VERSIONS

- GDM 16/80/1 - 8Ω, catalogue number 9 5153 017 01

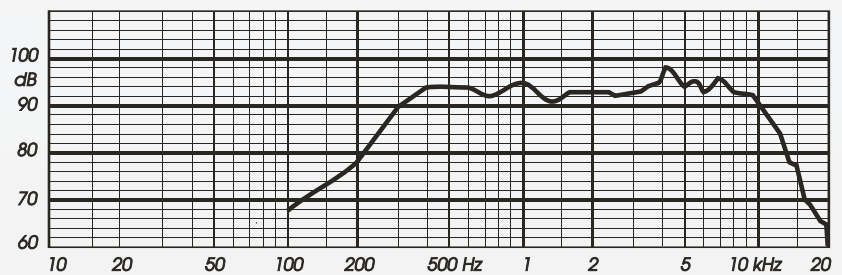

### FREQUENCY RESPONSE CURVE

Measured in anechoic room at 1W/1m. Loudspeaker mounted in sealed 6,7dm<sup>3</sup> enclosure.

