

TOSHIBA CMOS Digital Integrated Circuit Silicon Monolithic

TC7MH161FK, TC7MH163FK

Synchronous Presetable 4-Bit Binary Counter

TC7MH161FK Asynchronous Clear

TC7MH163FK Synchronous Clear

The TC7MH161FK and 163FK are advanced high speed CMOS synchronous presetable 4-bit binary counters fabricated with silicon gate C²MOS technology.

They achieve the high speed operation similar to equivalent bipolar schottky TTL while maintaining the CMOS low power dissipation.

The CK input is active on the rising edge. Both $\overline{\text{LOAD}}$ and $\overline{\text{CLR}}$ inputs are active on low logic level.

Presetting of each IC's is synchronous to the rising edge of CK.


The clear function of the TC7MH163FK is synchronous to CK, while the TC7MH161FK are cleared asynchronously.

Two enable inputs (ENP and ENT) and CARRY OUTPUT are provided to enable easy cascading of counters, which facilitates easy implementation of n-bit counters without using external gates.

An input protection circuit ensures that 0 to 7 V can be applied to the input pins without regard to the supply voltage. This device can be used to interface 5 V to 3 V systems and two supply systems such as battery back up. This circuit prevents device destruction due to mismatched supply and input voltages.


Features

- High speed: $f_{\text{max}} = 185 \text{ MHz (typ.) (VCC = 5 V)}$
- Low power dissipation: $I_{\text{CC}} = 4 \mu\text{A (max) (Ta = 25^\circ\text{C})}$
- High noise immunity: $V_{\text{NIH}} = V_{\text{NIL}} = 28\% V_{\text{CC (min)}}$
- Power down protection is equipped with all inputs.
- Balanced propagation delays: $t_{\text{pLH}} \approx t_{\text{pHL}}$
- Wide operating voltage range: $V_{\text{CC (opr)}} = 2\sim 5.5 \text{ V}$
- Low noise: $V_{\text{OLP}} = 0.8 \text{ V (max)}$
- Pin and function compatible with 74ALS161/163

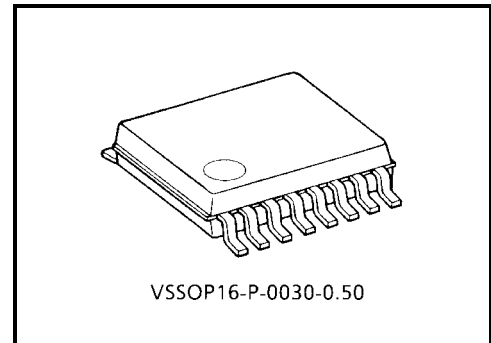


Weight: 0.02 g (typ.)

Pin Assignment (top view)

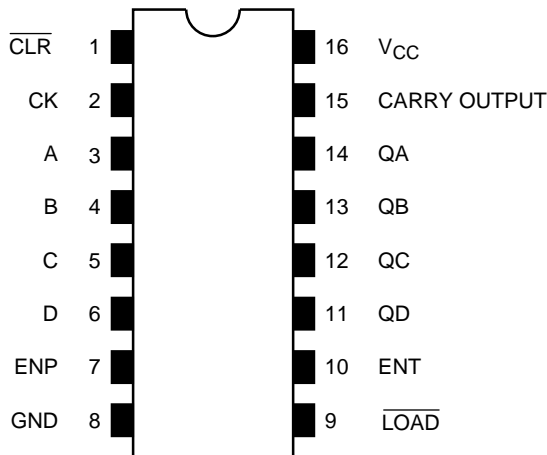

IEC Logic Symbol

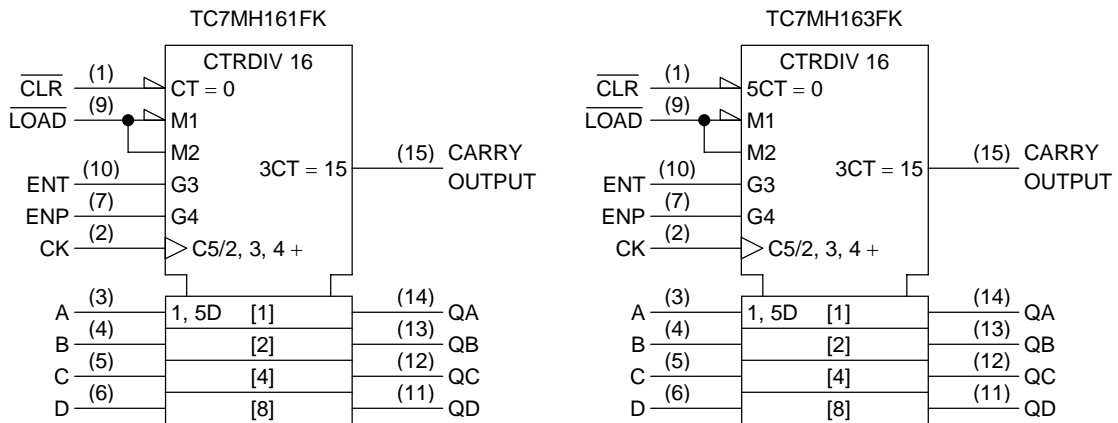

Truth Table


TC7MH161FK					TC7MH163FK					Outputs				Function
Inputs					Inputs					QA	QB	QC	QD	
$\overline{\text{CLR}}$	$\overline{\text{LD}}$	ENP	ENT	CK	$\overline{\text{CLR}}$	$\overline{\text{LD}}$	ENP	ENT	CK	QA	QB	QC	QD	
L	X	X	X	X	L	X	X	X	\uparrow	L	L	L	L	Reset to "0"
H	L	X	X	\uparrow	H	L	X	X	\uparrow	A	B	C	D	Reset data.
H	H	X	L	\uparrow	H	H	X	L	\uparrow	No change				No count
H	H	L	X	\uparrow	H	H	L	X	\uparrow	No change				No count
H	H	H	H	\uparrow	H	H	H	H	\uparrow	Count up				Count
H	X	X	X	\downarrow	X	X	X	X	\downarrow	No change				No count

X: Don't care


A, B, C, D: Logic level of data inputs

Carry: CARRY = ENT · QA · QB · QC · QD

Timing Chart

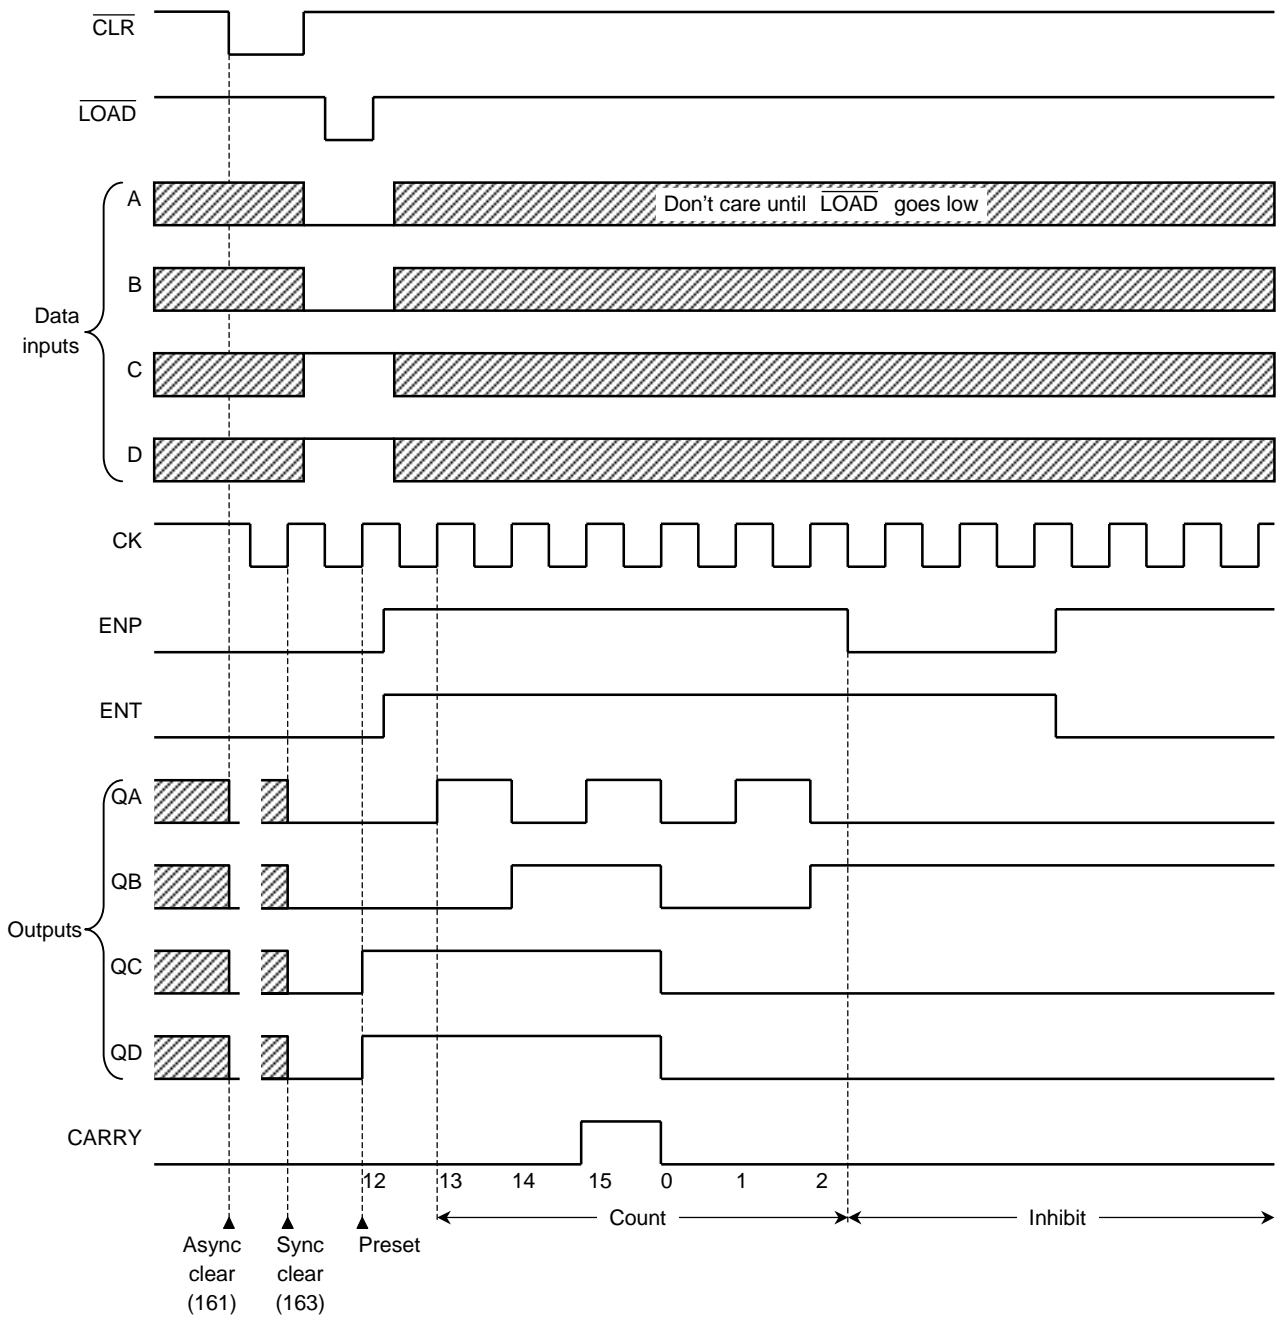

System Diagram

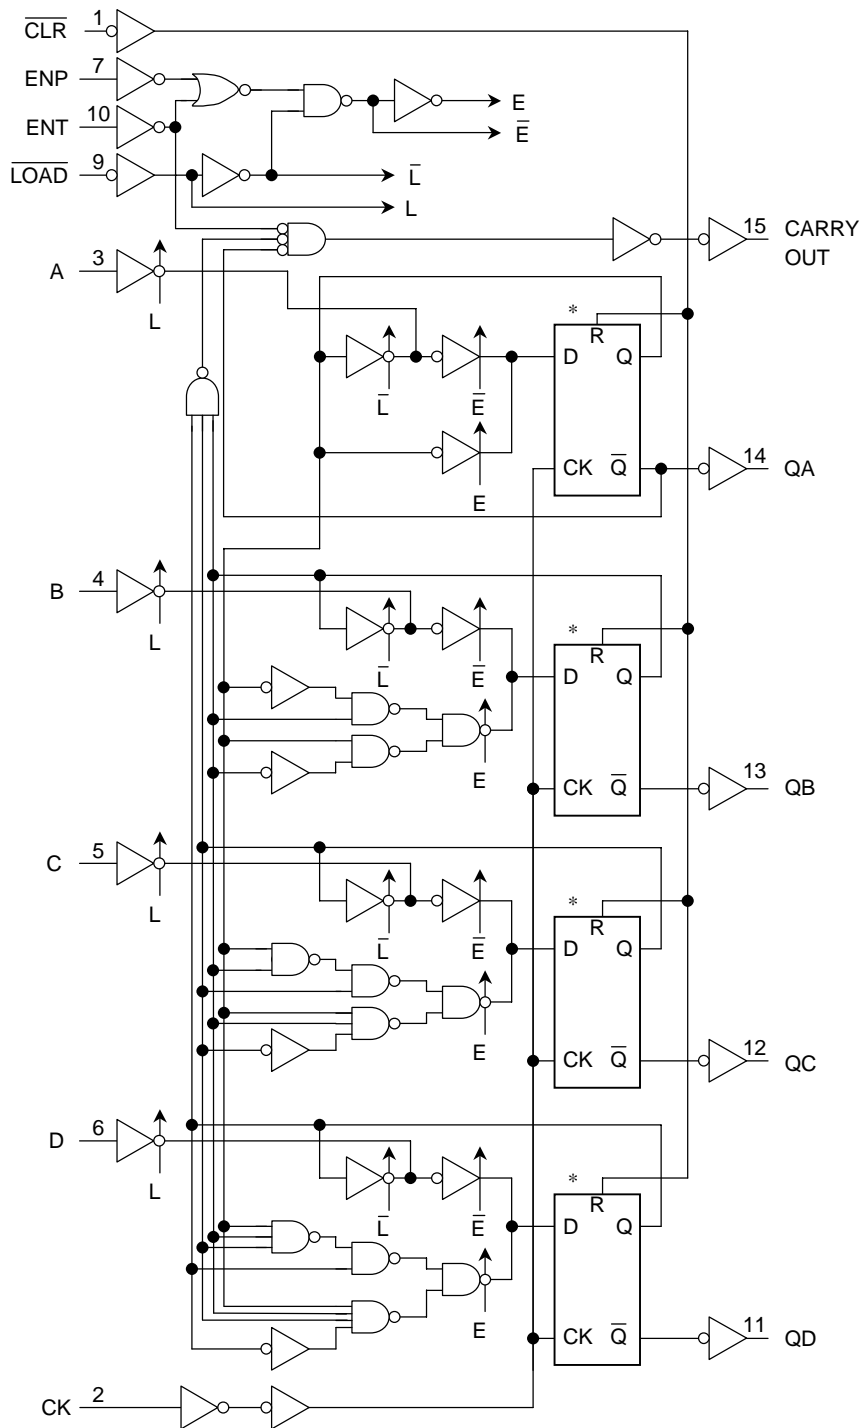

*: Truth table of internal F/F

TC7MH161FK					TC7MH163FK				
D	CK	R	Q	\bar{Q}	D	CK	R	Q	\bar{Q}
X	X	H	L	H	X	\uparrow	H	L	H
L	\uparrow	L	L	H	L	\uparrow	L	L	H
H	\uparrow	L	H	L	H	\uparrow	L	H	L
X	\downarrow	L	No change		X	\downarrow	X	No change	

X: Don't care

Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Supply voltage range	V _{CC}	-0.5~7.0	V
DC input voltage	V _{IN}	-0.5~7.0	V
DC output voltage	V _{OUT}	-0.5~V _{CC} + 0.5	V
Input diode current	I _{IK}	-20	mA
Output diode current	I _{OK}	±20	mA
DC output current	I _{OUT}	±25	mA
DC V _{CC} /ground current	I _{CC}	±50	mA
Power dissipation	P _D	180	mW
Storage temperature	T _{stg}	-65~150	°C

Recommended Operating Conditions

Characteristics	Symbol	Rating	Unit
Supply voltage	V _{CC}	2.0~5.5	V
Input voltage	V _{IN}	0~5.5	V
Output voltage	V _{OUT}	0~V _{CC}	V
Operating temperature	T _{opr}	-40~85	°C
Input rise and fall time	dt/dv	0~100 (V _{CC} = 3.3 ± 0.3 V)	ns/V
		0~20 (V _{CC} = 5 ± 0.5 V)	

Electrical Characteristics

DC Characteristics

Characteristics		Symbol	Test Condition	Ta = 25°C			Ta = -40~85°C		Unit		
				V _{CC} (V)	Min	Typ.	Max	Min		Max	
Input voltage	High level	V _{IH}	—	2.0	1.50	—	—	1.50	V		
				3.0~5.5	V _{CC} × 0.7	—	—	V _{CC} × 0.7		—	
	Low level	V _{IL}	—	2.0	—	—	0.50	—		0.50	
				3.0~5.5	—	—	V _{CC} × 0.3	—		V _{CC} × 0.3	
Output voltage	High level	V _{OH}	V _{IN} = V _{IH} or V _{IL}	I _{OH} = -50 μA	2.0	1.9	2.0	—	1.9	V	
					3.0	2.9	3.0	—	2.9		—
				4.5	4.4	4.5	—	4.4	—		
				I _{OH} = -4 mA	3.0	2.58	—	—	2.48		—
					4.5	3.94	—	—	3.80		—
				Low level	V _{OL}	V _{IN} = V _{IH} or V _{IL}	I _{OL} = 50 μA	2.0	—		0
	3.0	—	0					0.1	—		0.1
	I _{OL} = 4 mA	3.0	—				—	0.36	—		0.44
		4.5	—				—	0.36	—		0.44
	Input leakage current		I _{IN}	V _{IN} = 5.5 V or GND	0~5.5	—	—	±0.1	—		±1.0
Quiescent supply current		I _{CC}	V _{IN} = V _{CC} or GND	5.5	—	—	4.0	—	40.0	μA	

Timing Requirements (Input: $t_r = t_f = 3 \text{ ns}$)

Characteristics	Symbol	Test Condition	Ta = 25°C		Ta = -40~85°C		Unit
			VCC (V)	Limit	Limit	Limit	
Minimum pulse width (CK)	$t_w(H)$ $t_w(L)$	Figure 1	3.3 ± 0.3	5.0	5.0	ns	
			5.0 ± 0.5	5.0	5.0		
Minimum pulse width (\overline{CLR})	$t_w(L)$	Figure 4 (Note1)	3.3 ± 0.3	5.0	5.0	ns	
			5.0 ± 0.5	5.0	5.0		
Minimum set-up time (A, B, C, D)	t_s	Figure 2	3.3 ± 0.3	5.5	6.5	ns	
			5.0 ± 0.5	4.5	4.5		
Minimum set-up time (\overline{LOAD})	t_s	Figure 2	3.3 ± 0.3	8.0	9.5	ns	
			5.0 ± 0.5	5.0	6.0		
Minimum set-up time (ENT, ENP)	t_s	Figure 3	3.3 ± 0.3	7.5	9.0	ns	
			5.0 ± 0.5	5.0	6.0		
Minimum set-up time (\overline{CLR})	t_s	Figure 5 (Note2)	3.3 ± 0.3	4.0	4.0	ns	
			5.0 ± 0.5	3.5	3.5		
Minimum hold time	t_h	Figure 2, Figure 3	3.3 ± 0.3	1.0	1.0	ns	
			5.0 ± 0.5	1.0	1.0		
Minimum hold time (\overline{CLR})	t_h	Figure 5 (Note2)	3.3 ± 0.3	1.0	1.0	ns	
			5.0 ± 0.5	1.5	1.5		
Minimum removal time (\overline{CLR})	t_{rem}	Figure 4 (Note1)	3.3 ± 0.3	2.5	2.5	ns	
			5.0 ± 0.5	1.5	1.5		

Note1: for TC7MH161FK only

Note2: for TC7MH163FK only

AC Characteristics (Input: $t_r = t_f = 3 \text{ ns}$)

Characteristics	Symbol	Test Condition			Ta = 25°C			Ta = -40~85°C		Unit
			V _{CC} (V)	C _L (pF)	Min	Typ.	Max	Min	Max	
Propagation delay time (CK-Q)	t_{pLH} t_{pHL}	Figure 1, Figure 2	3.3 ± 0.3	15	—	8.3	12.8	1.0	15.0	ns
				50	—	10.8	16.3	1.0	18.5	
			5.0 ± 0.5	15	—	4.9	8.1	1.0	9.5	
				50	—	6.4	10.1	1.0	11.5	
Propagation delay time (CK-CARRY) [Count mode]	t_{pLH} t_{pHL}	Figure 1	3.3 ± 0.3	15	—	8.7	13.6	1.0	16.0	ns
				50	—	11.2	17.1	1.0	19.5	
			5.0 ± 0.5	15	—	4.9	8.1	1.0	9.5	
				50	—	6.4	10.1	1.0	11.5	
Propagation delay time (CK-CARRY) [Preset mode]	t_{pLH} t_{pHL}	Figure 2	3.3 ± 0.3	15	—	11.0	17.2	1.0	20.0	ns
				50	—	13.5	20.7	1.0	23.5	
			5.0 ± 0.5	15	—	6.2	10.3	1.0	12.0	
				50	—	7.7	12.3	1.0	14.0	
Propagation delay time (ENT-CARRY)	t_{pLH} t_{pHL}	Figure 6	3.3 ± 0.3	15	—	7.5	12.3	1.0	14.5	ns
				50	—	10.5	15.8	1.0	18.0	
			5.0 ± 0.5	15	—	4.9	8.1	1.0	9.5	
				50	—	6.4	10.1	1.0	11.5	
Propagation delay time ($\overline{\text{CLR}}$ -Q)	t_{pHL}	Figure 4 (Note4)	3.3 ± 0.3	15	—	8.9	13.6	1.0	16.0	ns
				50	—	11.2	17.1	1.0	19.5	
			5.0 ± 0.5	15	—	5.5	9.0	1.0	10.5	
				50	—	7.0	11.0	1.0	12.5	
Propagation delay time ($\overline{\text{CLR}}$ -CARRY)	t_{pHL}	Figure 4 (Note4)	3.3 ± 0.3	15	—	8.4	13.2	1.0	15.5	ns
				50	—	10.9	16.7	1.0	19.0	
			5.0 ± 0.5	15	—	5.0	8.6	1.0	10.0	
				50	—	6.5	10.6	1.0	12.0	
Maximum clock frequency	f_{max}	—	3.3 ± 0.3	15	80	130	—	70	—	MHz
				50	55	85	—	50	—	
			5.0 ± 0.5	15	135	185	—	115	—	
				50	95	125	—	85	—	
Input capacitance	C _{IN}	—	—	—	4	10	—	10	pF	
Power dissipation capacitance	C _{PD}	(Note3)	—	—	23	—	—	—	pF	

Note3: C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation:

$$I_{CC (opr)} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}$$

When the outputs drive a capacitive load, total current consumption is the sum of C_{PD}, and ΔI_{CC} which is obtained from the following formula:

$$\Delta I_{CC} = f_{CK} \cdot V_{CC} \left(\frac{C_{QA}}{2} + \frac{C_{QB}}{4} + \frac{C_{QC}}{8} + \frac{C_{QD}}{16} + \frac{C_{CO}}{16} \right)$$

C_{QA}~C_{QD} and C_{CO} are the capacitance QA~QD and CARRY OUT, respectively.
f_{CK} is the input frequency of the CK.

Note4: for TC7MH161FK only

AC Test Waveform

Count Mode

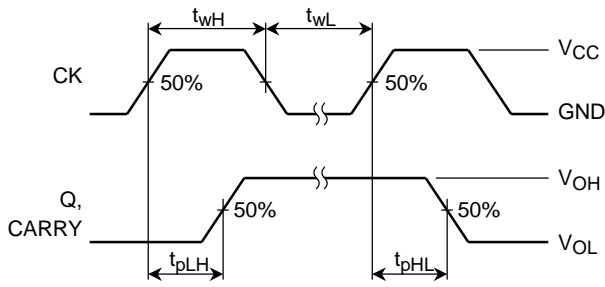


Figure 1

Preset Mode

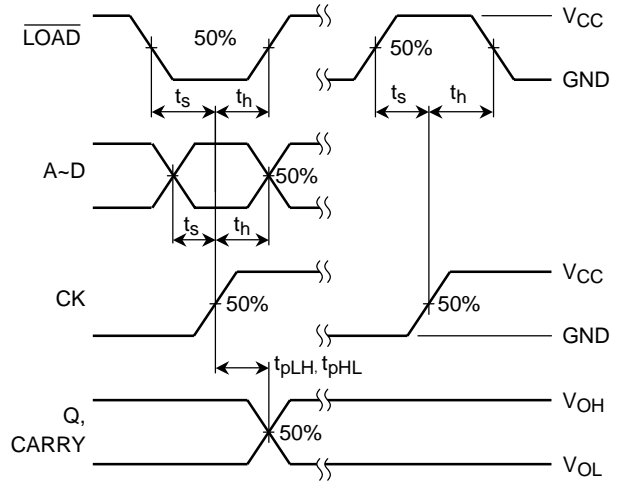


Figure 2

Count Enable Mode

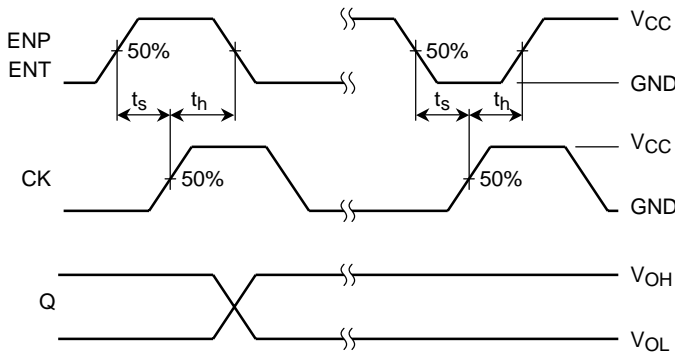


Figure 3

Clear Mode (TC7MH161FK)

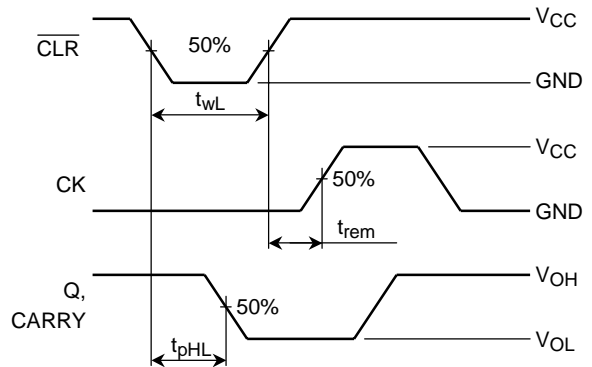


Figure 4

Clear Mode (TC7MH163FK)

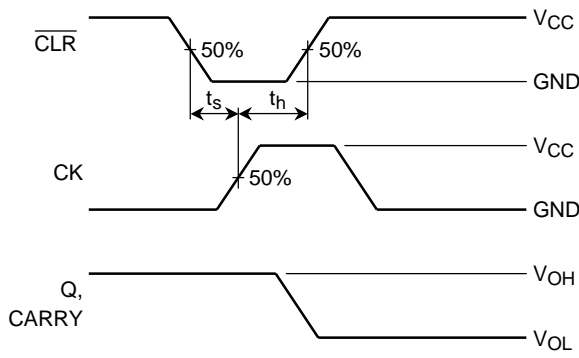


Figure 5

Cascade Mode (fix maximum count)


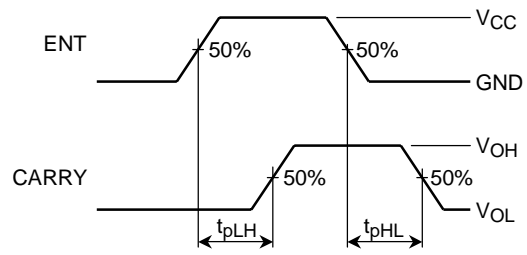


Figure 6

Noise Characteristics (Input: $t_r = t_f = 3$ ns)


Characteristics	Symbol	Test Condition	Ta = 25°C		Unit	
			VCC (V)	Typ.		Limit
Quiet output maximum dynamic V_{OL}	V_{OLP}	$C_L = 50$ pF	5.0	0.4	0.8	V
Quiet output minimum dynamic V_{OL}	V_{OLV}	$C_L = 50$ pF	5.0	-0.4	-0.8	V
Minimum high level dynamic input voltage V_{IH}	V_{IHD}	$C_L = 50$ pF	5.0	—	3.5	V
Maximum low level dynamic input voltage V_{IL}	V_{ILD}	$C_L = 50$ pF	5.0	—	1.5	V

Input Equivalent Circuit

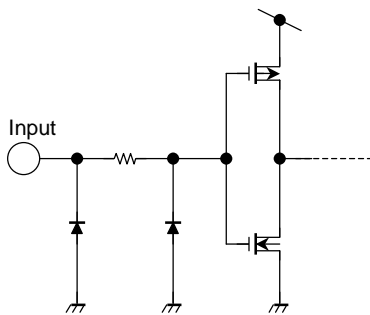

Typical Application


Parallel Carry N-Bit Counter

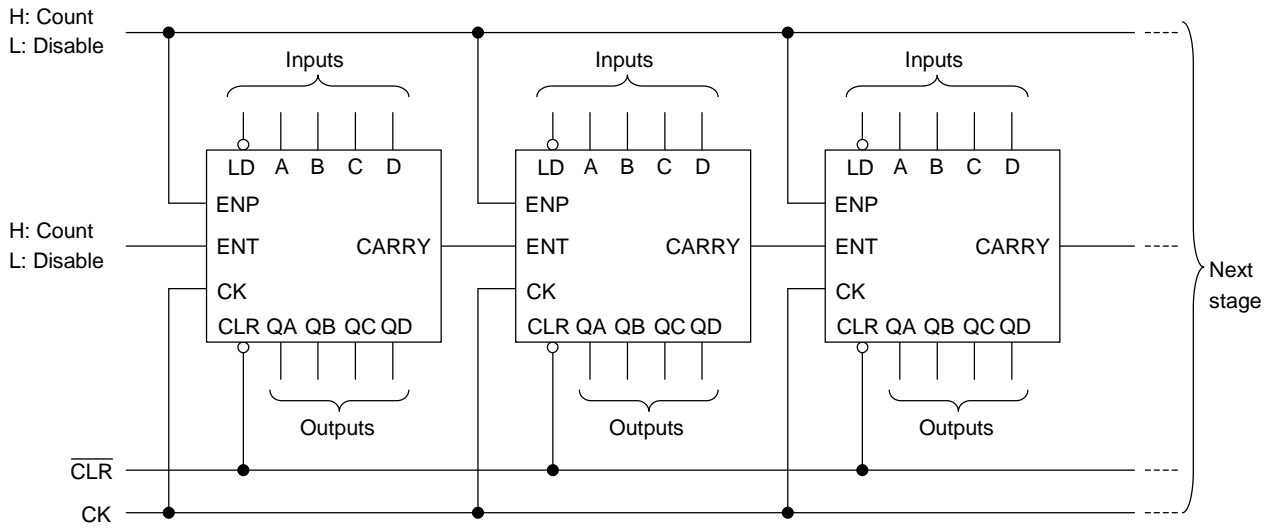

Package Dimensions

VSSOP16-P-0030-0.50

Unit : mm

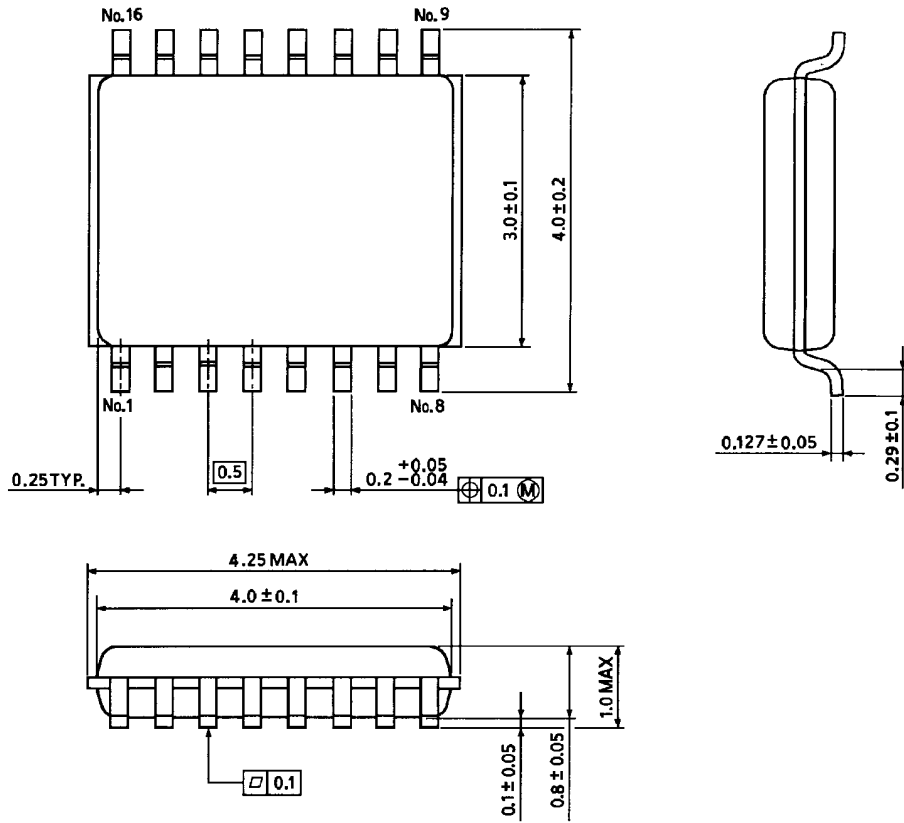

Weight: 0.02 g (typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.