

CK 1X

CARDIOID CAPSULE



Low-profile matte black capsule
Can be used away from the C 460 B
preamplifier for visually unobtrusive
placement.

A built-in miniature connector
accepts the MK 46/3 cord connecting

the CK 1 X to the C 460 B.
The 3-m (10-ft.) MK 46/3 may be
extended to 60 m (180 ft.) max.
(depending on
surrounding rf field
strengths) with an
MK 46/length-in-m
extension cord

The H 52 stereo hanger allows two
CK 1 X capsules to be set up in an XY
or ORTF configuration.

MK 46/3 and C 460 B are not
supplied with the CK 1 X.



REQUIRED ACCESSORIES


C 460 B Microphone preamplifier
MK 46/3 Capsule cord
H 48 Stand adapter

OPTIONAL ACCESSORIES

St 46 Table stand
MK 46/. Extension cord (specify length in m)
W 32 Foam windscreen
H 46 Spider suspension
H 52 Stereo hanger
N 62, N 66 AC power supplies
B 18 Battery power supply

SPECIFICATIONS (with C 460 B)

Polar Pattern:	cardioid
Frequency Range:	20 – 20,000 Hz
Sensitivity:	8 mV/Pa
Equivalent Noise Level:	24 dB (CCIR 468-2) 18 dB-A (DIN 45412-A)
S/N Ratio:	76 dB
Max. SPL for 0.5% THD:	140 dB
Size:	18 Ø x 40 mm (0.7 Ø x 1.6 in.)
Net/Shipping Weight:	30/150 g (1.1/5.3 oz.)

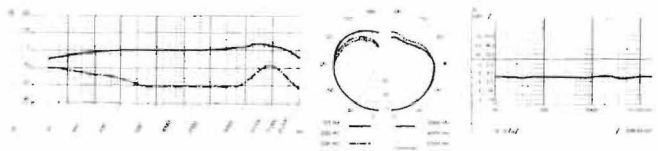

CK 2X

OMNIDIRECTIONAL CAPSULE



Same as CK 1 X, except for omni-
directional polar pattern. Connection and
accessories as CK 1 X.

SPECIFICATIONS (with C 460 B)

Polar Pattern:	omnidirectional
Frequency Range:	20 – 20,000 Hz
Sensitivity:	6 mV/Pa
Equivalent Noise Level:	26 dB (CCIR 468-2) 20 dB-A (DIN 45412-A)
S/N Ratio:	74 dB
Max. SPL for 0.5% THD:	140 dB
Size:	18 Ø x 40 mm (0.7 Ø x 1.6 in.)
Net/Shipping Weight:	30/150 g (1.1/5.3 oz.)

