




# TSH11

## 120MHz BANDWIDTH MOS INPUT SINGLE OPERATIONAL AMPLIFIER

- VERY LOW INPUT CURRENT : 2pA typ
- GAIN BANDWIDTH PRODUCT : 120MHz
- UNITY GAIN STABLE
- SLEW RATE : 150V/ $\mu$ s
- STANDARD PIN OUT

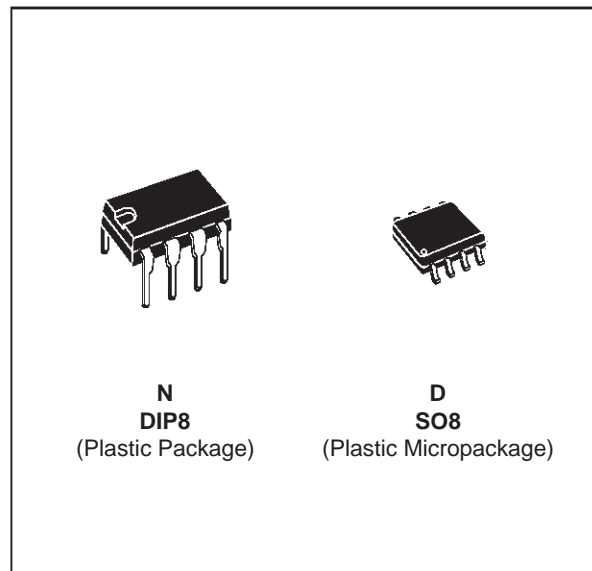


### DESCRIPTION

The TSH11 is a low cost wide bandwidth single operational amplifier featuring extremely low input current of 2pA typ. Other features as unity gain stability, fast settling time and high linearity make it suitable for many applications requiring speed and very high input impedance as photo cell amplifier, high input impedance buffer, Fet probe, high speed precision integrator, sample and hold circuit...


### ORDER CODES

| Part Number | Temperature Range | Package |   |
|-------------|-------------------|---------|---|
|             |                   | N       | D |
| TSH11       | -40°C, 125°C      | •       | • |


### PIN CONNECTIONS (top view)

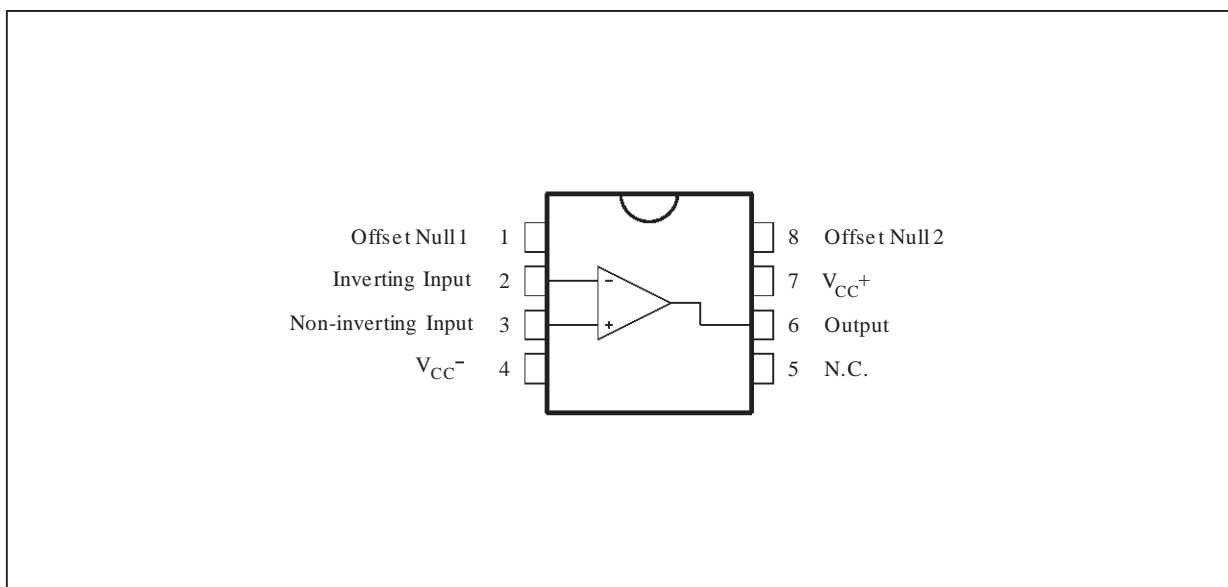

**SCHEMATIC DIAGRAM**

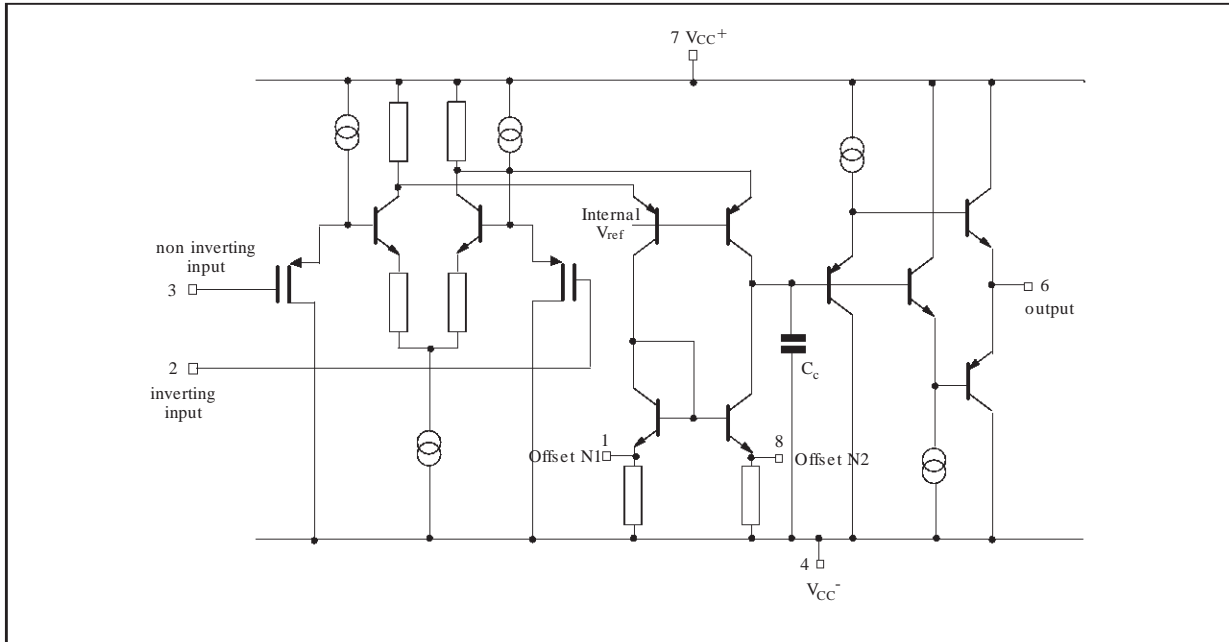

**INPUT OFFSET VOLTAGE NULL CIRCUIT**

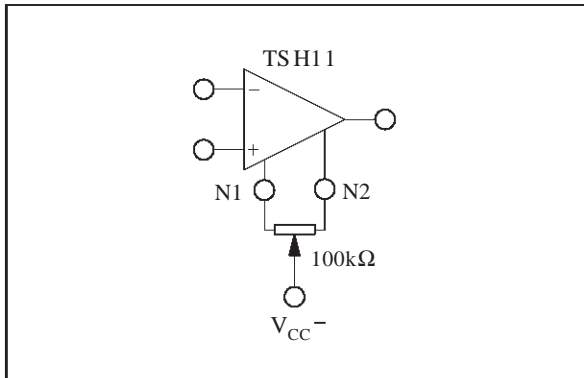

**ABSOLUTE MAXIMUM RATINGS**

| Symbol     | Parameter                            | Value                      | Unit   |                    |
|------------|--------------------------------------|----------------------------|--|--------------------|
| $V_{CC}$   | Supply Voltage                       | $\pm 7$                    | V  |                    |
| $V_{id}$   | Differential Input Voltage           | $\pm 5$                    | V  |                    |
| $V_i$      | Input Voltage Range                  | $\pm 5$                    | V  |                    |
| $I_{in}$   | Current On Offset Null Pins          | $\pm 20$                   | mA   |                    |
| $T_{oper}$ | Operating Free-Air Temperature Range | TSH11C<br>TSH111<br>TSH11M | $0^{\circ}\text{C} + 70$<br>$-40^{\circ}\text{C} + 105$<br>$-55^{\circ}\text{C} + 125$ | $^{\circ}\text{C}$ |


**OPERATING CONDITIONS**

| Symbol   | Parameter                       | Value                      | Unit |
|----------|---------------------------------|----------------------------|------|
| $V_{CC}$ | Supply Voltage                  | $\pm 3$ to $\pm 6$         | V    |
| $V_{ic}$ | Common Mode Input Voltage Range | $V_{CC-}$ to $V_{CC+} - 3$ | V    |

**ELECTRICAL CHARACTERISTICS** $V_{CC} = \pm 5V$ ,  $T_{amb} = 25^{\circ}C$  (unless otherwise specified)

| Symbol    | Parameter  | Min.      | Typ.         | Max. | Unit                   |
|-----------|--|-----------|--------------|------|------------------------|
| $V_{io}$  | Input Offset Voltage   |           | 3            | 15   | mV                     |
| $DV_{io}$ | Input Offset Voltage Drift<br>$T_{min} \leq T_{amb} \leq T_{max}$            |           | 20           |      | $\mu V/^{\circ}C$      |
| $I_{ib}$  | Input Bias Current   |           | 2            | 300  | pA                     |
| $I_{io}$  | Input Offset Current   |           | 2            | 200  | pA                     |
| $I_{CC}$  | Supply Current, no load<br>$V_{CC} = \pm 5V$                                 |           | 20           | 40   | mA                     |
| $A_{vd}$  | Large Signal Voltage Gain<br>$V_o = \pm 2.5V$<br>$R_L = 100\Omega$           | 200       | 800          |      | V/V                    |
| $V_{icm}$ | Input Common Mode Voltage Range  | -5 to +2  | -5.5 to +2.5 |      | V                      |
| CMR       | Common Mode Rejection Ratio<br>$V_{ic} = V_{icm \text{ min.}}$               | 55        | 95           |      | dB                     |
| SVR       | Supply Voltage Rejection Ratio<br>$V_{CC} = \pm 5V$ to $\pm 3V$              | 45        | 65           |      | dB                     |
| $V_o$     | Output Voltage<br>$R_L = 100\Omega$  | $\pm 2.5$ | +3.5<br>-3.7 |      | V                      |
| $I_o$     | Output Short Circuit Current<br>$V_{id} = \pm 1V$ , $V_o = 0V$               |           | $\pm 70$     |      | mA                     |
| GBP       | Gain Bandwidth Product<br>$A_{VCL} = 100$ , $R_L = 100\Omega$ , $f = 7.5MHz$ |           | 120          |      | MHz                    |
| SR        | Slew Rate<br>$V_{in} = \pm 2V$ , $A_{VCL} = 1$ , $R_L = 100\Omega$           |           | 150          |      | V/ $\mu s$             |
| $e_n$     | Equivalent Input Voltage Noise<br>$f = 1MHz$                                 |           | 20           |      | $\frac{nV}{\sqrt{Hz}}$ |
| $\phi_m$  | Phase Margin<br>$A_{VM} = 1$ , $R_L = 100\Omega$ , $C_L = 15pF$              |           | 40           |      | Degrees                |

EVALUATION CIRCUIT

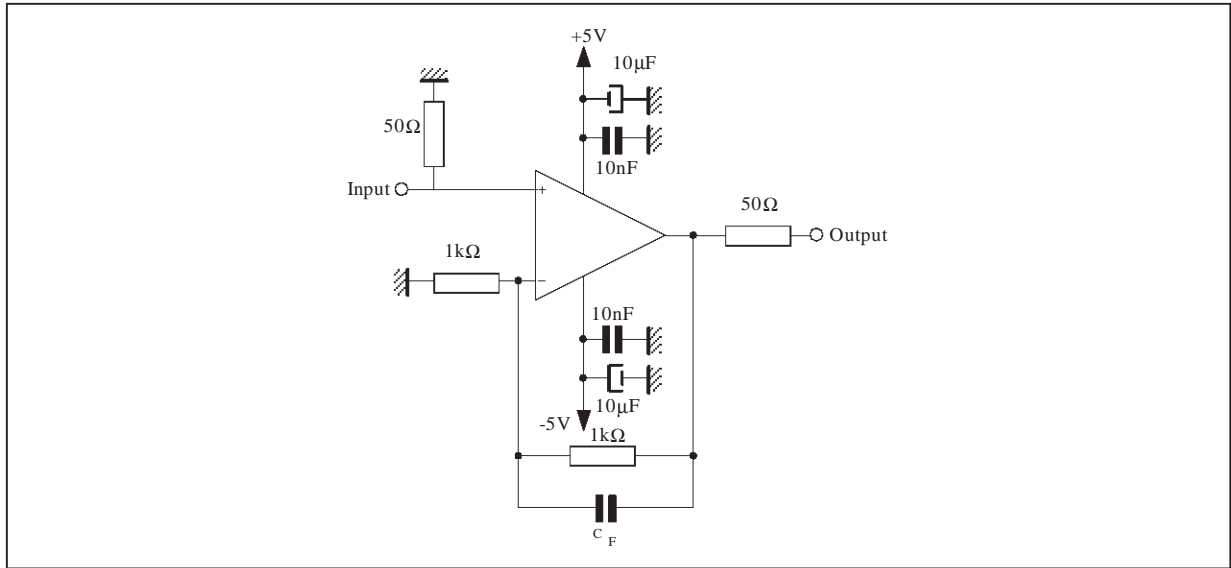

PRINTED CIRCUIT LAYOUT

As for any high frequency device, a few rules must be observed when designing the PCB to get the best performances from your this speed op amp.

From the most to the least important points :


- Each power supply lead has to be bypassed to ground with a 10nF ceramic capacitor very close to the device and a 10μF tantalum capacitor.
- To provide low inductance and low resistance common return, use a ground plane or common point return for power and signal.
- All leads must be wide and as short as possible especially for op amp inputs. This is in order to decrease parasitic capacitance and

inductance.

- Use small resistor values to decrease time constant with parasitic capacitance.
- Choose component sizes as small as possible (SMD).
- On output, decrease capacitor load so as to avoid circuit stability being degraded which may cause oscillation. One can also add a serial resistor in order to minimise its influence.
- One can add in parallel with feedback resistor a few pF ceramic capacitor  $C_F$  adjusted to optimize the settling time.


## PACKAGE MECHANICAL DATA

8 PINS - PLASTIC DIP

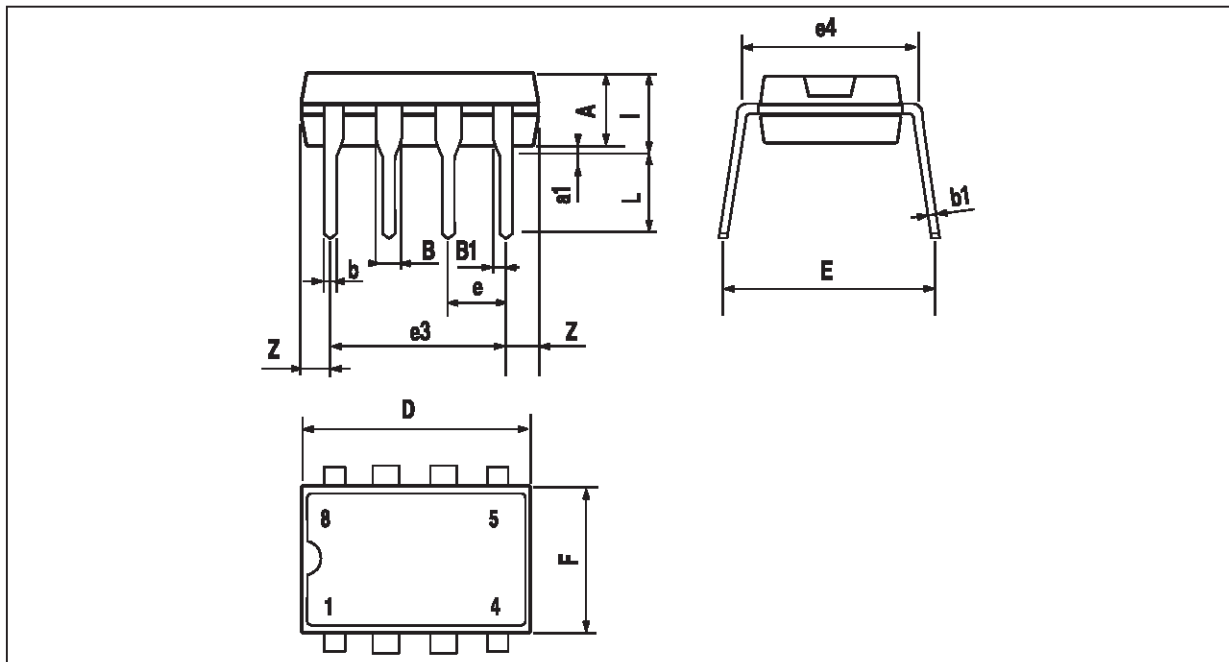

| Dimensions | Millimeters |      |       | Inches |       |       |
|------------|-------------|------|-------|--------|-------|-------|
|            | Min.        | Typ. | Max.  | Min.   | Typ.  | Max.  |
| A          |             | 3.32 |       |        | 0.131 |       |
| a1         | 0.51        |      |       | 0.020  |       |       |
| B          | 1.15        |      | 1.65  | 0.045  |       | 0.065 |
| b          | 0.356       |      | 0.55  | 0.014  |       | 0.022 |
| b1         | 0.204       |      | 0.304 | 0.008  |       | 0.012 |
| D          |             |      | 10.92 |        |       | 0.430 |
| E          | 7.95        |      | 9.75  | 0.313  |       | 0.384 |
| e          |             | 2.54 |       |        | 0.100 |       |
| e3         |             | 7.62 |       |        | 0.300 |       |
| e4         |             | 7.62 |       |        | 0.300 |       |
| F          |             |      | 6.6   |        |       | 0.260 |
| i          |             |      | 5.08  |        |       | 0.200 |
| L          | 3.18        |      | 3.81  | 0.125  |       | 0.150 |
| Z          |             |      | 1.52  |        |       | 0.060 |

**PACKAGE MECHANICAL DATA**  
**8 PINS - PLASTIC MICROPACKAGE (SO)**

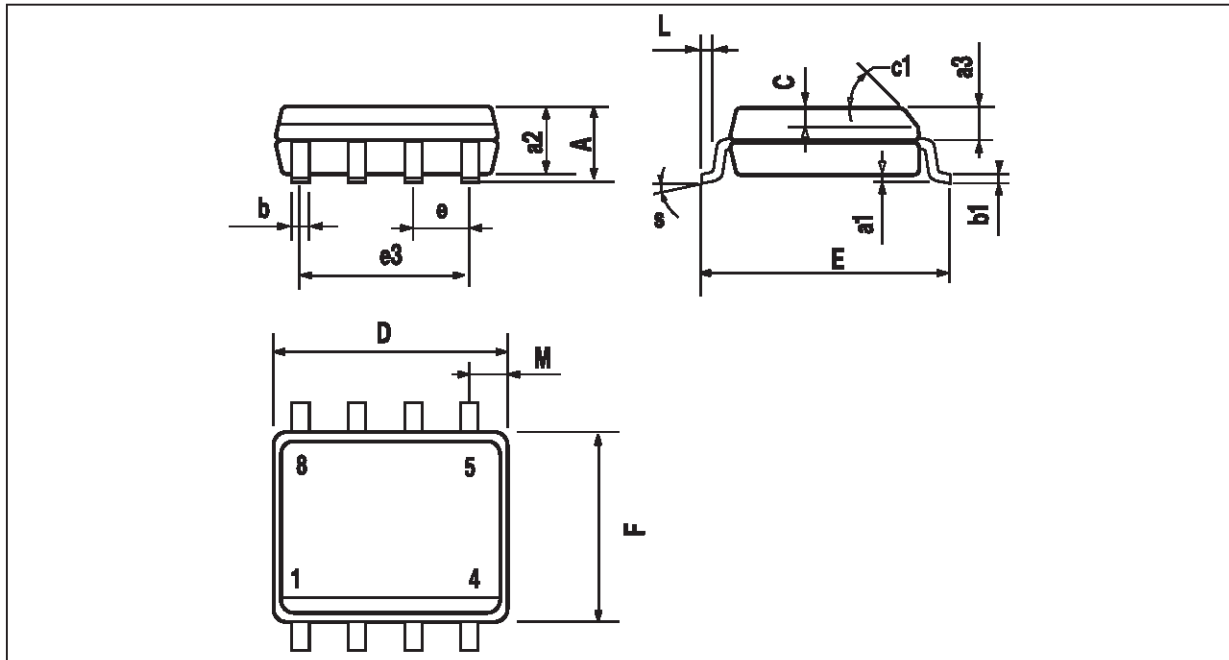

| Dimensions | Millimeters |      |      | Inches |       |       |
|------------|-------------|------|------|--------|-------|-------|
|            | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A          |             |      | 1.75 |        |       | 0.069 |
| a1         | 0.1         |      | 0.25 | 0.004  |       | 0.010 |
| a2         |             |      | 1.65 |        |       | 0.065 |
| a3         | 0.65        |      | 0.85 | 0.026  |       | 0.033 |
| b          | 0.35        |      | 0.48 | 0.014  |       | 0.019 |
| b1         | 0.19        |      | 0.25 | 0.007  |       | 0.010 |
| C          | 0.25        |      | 0.5  | 0.010  |       | 0.020 |
| c1         | 45° (typ.)  |      |      |        |       |       |
| D          | 4.8         |      | 5.0  | 0.189  |       | 0.197 |
| E          | 5.8         |      | 6.2  | 0.228  |       | 0.244 |
| e          |             | 1.27 |      |        | 0.050 |       |
| e3         |             | 3.81 |      |        | 0.150 |       |
| F          | 3.8         |      | 4.0  | 0.150  |       | 0.157 |
| L          | 0.4         |      | 1.27 | 0.016  |       | 0.050 |
| M          |             |      | 0.6  |        |       | 0.024 |
| S          | 8° (max.)   |      |      |        |       |       |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a trademark of STMicroelectronics

© 1998 STMicroelectronics – Printed in Italy – All Rights Reserved  
 STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco  
 The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.