

## DS9636A/ $\mu$ A9636A RS-423 Dual Programmable Slew Rate Line Driver

### General Description

The DS9636A/ $\mu$ A9636A is a TTL/CMOS compatible, dual, single ended line driver which has been specifically designed to satisfy the requirements of EIA Standard RS-423.


The DS9636A/ $\mu$ A9636A is suitable for use in digital data transmission systems where signal wave shaping is desired. The output slew rates are jointly controlled by a single external resistor connected between the wave shaping control lead (WS) and ground. This eliminates any need for external filtering of the output signals. Output voltage levels and slew rates are independent of power supply variations. Current-limiting is provided in both output states. The DS9636A/ $\mu$ A9636A is designed for nominal power supplies of  $\pm 12V$ .

Inputs are TTL compatible with input current loading low enough (1/10 UL) to be also compatible with CMOS logic. Clamp diodes are provided on the inputs to limit transients below ground.

### Features

- Programmable slew rate limiting
- Meets EIA Standard RS-423
- Commercial or extended temperature range
- Output short circuit protection
- TTL and CMOS compatible inputs

### Connection Diagram

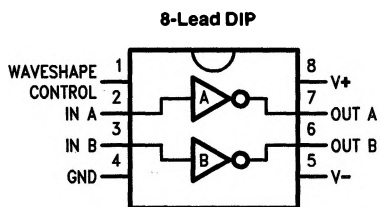

TL/F/9620-1

**Top View**

Order Number DS9636ACJ,  $\mu$ A9636ARC,  
DS9636AMJ,  $\mu$ A9636ARM or DS9636ACN,  $\mu$ A9636ATC  
See NS Package Number J08A or N08E

\*For most current package information, contact product marketing.