


ISOLATED PLASTIC

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	10.20	10.45	0.401	0.411
B	14.23	15.87	0.560	0.625
C	12.70	14.70	0.500	0.579
D	5.85	6.85	0.230	0.270
F		4.50		0.178
G	2.54	3.00	0.100	0.119
H	4.48	4.82	0.176	0.190
I	3.55	4.00	0.139	0.158
J	1.15	1.39	0.045	0.055
L	0.35	0.65	0.013	0.026
M	2.10	2.70	0.082	0.107
N	4.58	5.58	0.18	0.22
O	0.80	1.20	0.031	0.048
P	0.64	0.96	0.025	0.038



Weight = 2,3 g
 Marking : Type number
 Cooling method : C
 Recommended torque value : 0.8 m.N.
 Maximum torque value : 1.0 m.N.
 Electrical isolation : 2500V DC
 Capacitance : 7 pF

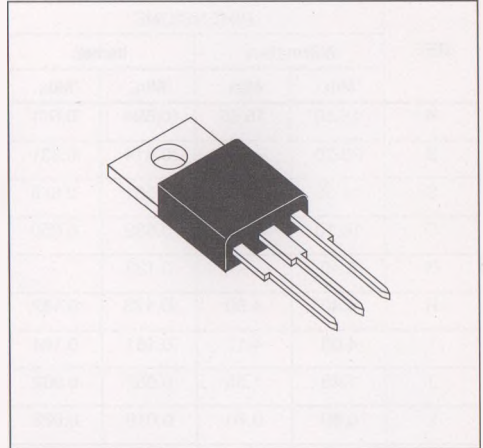